

Digimatic Indicators

ABSOLUTE Digimatic Indicator ID-SX2 SERIES 543

- Cost-effective oriented design
ID-SX2 indicators come with the minimum of functionality for ease of use. There is a choice of models in the lineup allowing selection of 0.01 mm, 0.001 mm or inch-based measurement resolutions.
- IP53 dust/water protection level
The models listed below also provide IP53 dust/water protection level specifications:
543-794(B)-10, **543-795(B)-10** and **543-796(B)-10**

- The ABS (absolute) scale restores the last origin position* automatically when the indicator is turned on, and realizes high reliability by eliminating over-speed errors.
- Equipped with a data output port that enables incorporation into measurement networking and statistical process control systems. (Refer to page A-3)

* Refer to "Origin Setting of Digimatic Indicators" on page F-25.



SPECIFICATIONS

Metric										
Order No.	Range (mm)	Resolution (mm)	Maximum permissible error*1 (mm)			Measuring force MPL (N)	Back type	Battery life*3	Net mass (g)	Dust/Water protection level*4
			MPE _E *2	Hysteresis MPE _H	Repeatability MPE _R					
543-790-10	12.7	0.001	0.003	0.002	0.002	1.5 or less	With lug Flat	Approx. 18,000 hours (Continuous use)	150	IP42
543-790B-10										
543-794-10										
543-794B-10										
543-781-10										
543-781B-10	0.01	0.02	0.02	0.01	1.5 or less	With lug Flat	Approx. 20,000 hours (Normal use)	140	IP42	

Inch/Metric										
Order No.	Range	Resolution	Maximum permissible error*1			Measuring force MPL (N)	Back type	Battery life*3	Net mass (g)	Dust/Water protection level*4
			MPE _E *2	Hysteresis MPE _H	Repeatability MPE _R					
543-791-10	0.5 in/ 12.7 mm	0.00005 in /0.001 mm	±0.0001 in /0.003 mm	0.0001 in /0.002 mm	0.0001 in /0.002 mm	1.5 or less	With lug Flat	Approx. 18,000 hours (Continuous use)	150	IP42
543-791B-10										
543-792-10										
543-792B-10										
543-793-10										
543-793B-10										
543-795-10										
543-795B-10										
543-796-10										
543-796B-10										
543-782-10	0.0005 in /0.01 mm	±0.0010 in /0.02 mm	0.0010 in /0.02 mm	0.0005 in /0.01 mm	1.5 or less	With lug Flat	Approx. 20,000 hours (Continuous use)	150	IP42	
543-782B-10										
543-783-10										
543-783B-10										

*1 These values apply at 20 °C.

*2 Error of indication for the total measuring range

*3 The battery life varies, depending on the number of times a Digimatic indicator is used as well as the way it is used. The values listed above are approximations.

*4 This is only valid when the data socket cover is in place. Does not apply if the cover is removed, a lifting accessory is attached, or a connecting cable is attached.

Note: Regarding origin setting, refer to "Origin Setting of Digimatic Indicators" on page F-25.

MeasurLink[®] ENABLED
Data Management Software by Mitutoyo

ABSOLUTE[™]

IP53



Applicable models:
See **SPECIFICATIONS**

Technical Data

- Display: 6-digit LCD, sign
- Usable orientation: All
- Scale type: ABSOLUTE electrostatic linear encoder
- Battery: SR44 (1 pc.), **938882** for initial operational checks (standard accessory)
- Maximum response speed: Unlimited (except for scanning measurement)

Functions

- Origin set (Zero-setting)
- Measuring direction switching
- Data output
- Low battery voltage alarm display
- Error alarm display

Optional Accessories

Lifting lever

Lifting knob



- Lifting
Lifting lever **21EZA198**
Lifting knob **21EZA105**
Lifting cable **21JZA295**
- SPC Cable:
905338 (1 m)
905409 (2 m)
- USB Input Tool Direct (2 m): **06AFM380F**
Note: Please separately purchase **USB-ITPAK** since there is no data output switch on the measurement instrument.
- Input Tool Series
IT-020U (USB Keyboard Signal Conversion Type):
264-020
IT-007R (RS-232C Communication Conversion Type):
264-007
- Connecting Cables for **U-WAVE-T** (160 mm):
02AZD790F
For foot switch: **02AZE140F**
- Digimatic Mini-Processor **DP-1VA LOGGER: 264-505**
- Contact points for Mitutoyo's digimatic indicators (Refer to pages F-57 to F-60 for details.)
- Interchangeable backs for SERIES 2 models (Refer to page F-61 for details.)
- Measuring stands (Refer to pages F-84 to F-91 for details.)

IP53 dust/water protection level*

Level 5: Dust protection

While complete protection against intrusion of dust is not provided, protection is adequate to prevent dust intrusion in amounts that would inhibit the prescribed operations and safety of the electronic equipment.



Level 3: Protection against spraying water

The product suffers no harmful effects when subjected to water sprayed at an angle of up to 60° on both sides.

For details on the dust/water protection level test conditions, refer to IEC 60529: 2001 and JIS C 0920: 2003.

* IP code is the degree of protection against the intrusion of solid foreign objects and water. Mitutoyo offers a lineup of coolant proof, **ID-N/B** indicators that have excellent resistance to oil, water and dust and so are suitable for use in environments that include splashing cutting fluid. (Refer to page F-8 for details.)

DIMENSIONS

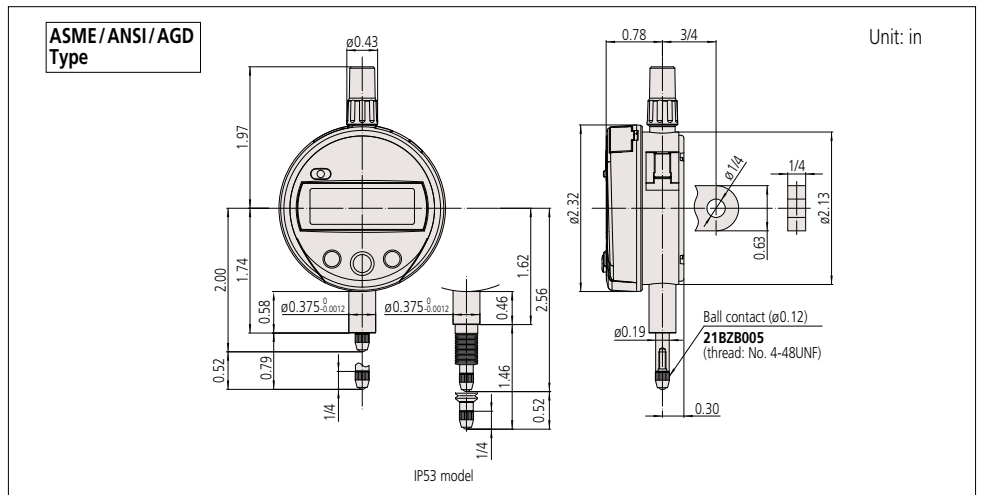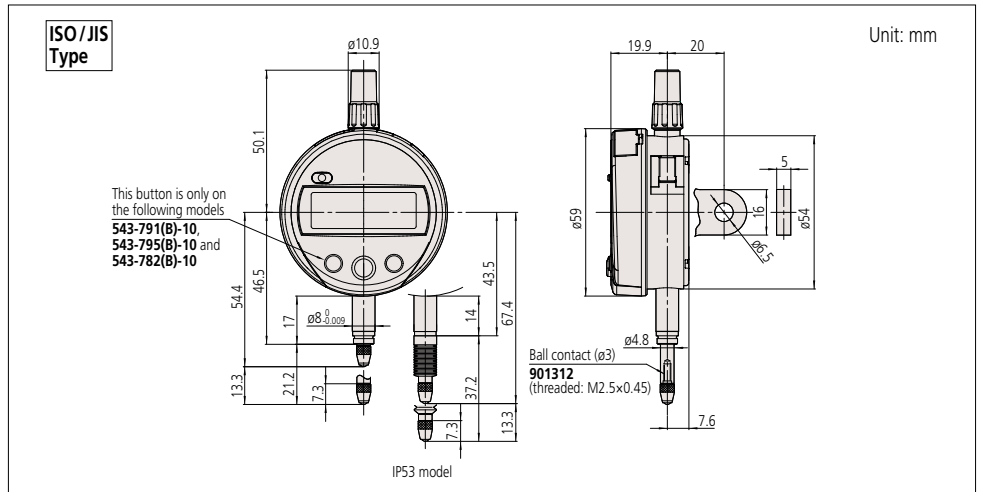

Digimatic Indicators

ABSOLUTE Digimatic Indicator ID-CNX SERIES 543 — Standard Type

- Supports bidirectional communication between the **ID-C** and the computer, enabling data output to a computer and setting of various functions of **ID-C** from a computer.
- The ABS (absolute) scale restores the last origin position* automatically when the indicator is turned on, and realizes high reliability by eliminating over-speed errors.
- Tolerance judgment can be performed by setting upper and lower tolerance limits. The judgment result (GO/NO-GO) can be displayed in full-size characters.

- An analog bar indicator has been integrated to make upper/lower limit and turnover point reading more comfortable.
- Battery life of approx. 2.5 years under normal use has been achieved with only one battery.
- Equipped with a data output port that enables incorporation into measurement networking and statistical process control systems. (Refer to page A-3)

* Refer to "Origin Setting of Digimatic Indicators" on page F-25.



Large LCD

A large LCD with an analog bar graph to improve the readability of measurement values.



Three large buttons

The ease of use has been greatly enhanced thanks to these three large buttons. The user can freely set any frequently used function to the buttons.



- Power switch
- Data output (when connected to an external device)
- Data hold (when no external device is connected)

- Parameter setting mode
Count direction switching, tolerance judgment setting, resolution switching, scale factor setting, and function lock setting
- inch/mm conversion (inch/mm type)

Switches between the ABS (preset) and INC (zeroset) measurement modes

330° rotary display

The display can be rotated 330°, allowing use at a position where you can easily read the measurement value.



Calibration schedule warning

An icon is displayed on the LCD to notify the user of the set calibration schedule. This function facilitates the proper precision management of the measuring instrument.



Notification icon



The calibration schedule warning icon starts blinking at a set time (e.g. 1 week before the calibration date) before the limit. If the limit is exceeded, the entire screen starts blinking to notify the user.



Technical Data

- Display: 7-digit LCD, sign, and analog bar
- Battery: CR2032 (1 pc.) for initial operational checks (standard accessory)
- Battery life: Approx. 2,700 hours of continuous use. Approx. 2.5 years under normal use.

Note: Depends on use of the indicator. The above values are reference values.

- Maximum response speed: Unlimited (except for scanning measurement)

Functions

- Peak detection (MAX/MIN)
- Runout range measurement (MAX - MIN)
- Zero-setting (INC system)
- Presetting (ABS system)
- Measuring direction switching
- Tolerance judgment
- Resolution switching (For 0.0005 mm or 0.00002 inch resolution type)
- Simple calculation: $f(x) = Ax$
- Function Lock
- Calibration schedule warning
- Auto power ON/OFF
- Data output
- Display value holding (when no external device is connected)
- 330° rotary display
- Low battery/voltage alarm display
- Error alarm display

Optional Accessories

- Lifting
Lifting lever: **21EZA198** (12.7 mm/0.5 inch type)
Lifting cable: **21JZA295** (stroke 12.7 mm: 12.7 mm/0.5 inch type)
Lifting knob:
21EZA105 (12.7 mm/0.5 inch type)*1
21EZA197 (25.4 mm/1 inch type)
21EZA200 (50.8 mm/2 inch type)
Lifting lever: **21EAA426** (for measuring range: 25.4 and 50.8 mm)
(supplied with 25.4 mm and 50.8 mm models as standard.)
- *1 Not available for low measuring force models.
- Auxiliary spindle spring:
02ACA571 (25.4 mm/1 inch type)*2
02ACA773 (50.8 mm/2 inch type)*2
- *2 Required when orienting the indicator upside down.
- SPC Cable:
06AGL011 (1 m)
06AGL021 (2 m)
- USB Input Tool Direct (2 m): **06AGQ001F**
- Input Tool Series
IT-020U (USB Keyboard Signal Conversion Type):
264-020
IT-007R (RS-232C Communication Conversion Type):
264-007
- Connecting Cables for **U-WAVE-T** (160 mm): **02AZG011**
For foot switch: **02AZG021**
- Connecting unit for **U-WAVE-TM/TMB**:
02AZF700 (12.7 mm/0.5 inch type)
- Digimatic Mini-Processor **DP-1VA LOGGER**: **264-505**
- Contact points for Mitutoyo's digimatic indicators (Refer to pages F-57 to F-60 for details.)
- Interchangeable backs for SERIES 2 models (Refer to page F-61 for details.)
- Measuring stands (Refer to pages F-84 to F-91 for details.)

Spindle orientation for measurement

- Standard models with measuring range 12.7 mm: Usable in all orientations.
- Models with measuring range 25.4 or 50.8 mm: Usable between the contact point pointing downward and spindle in horizontal orientation. To use the contact point pointing upward, the auxiliary spindle spring (optional) is required.
- Low measuring force model: See "Setting measuring force on low measuring force models" below.

Setting measuring force on low measuring force models

The measuring force of models with low measuring force can be set by combining standard accessory springs and weights.

• 543-715(B)/716(B)/717(B)

Spindle orientation	Spring	Weight (approximately 0.1 N)	Maximum measuring force (N)
Pointing vertically downward	Yes	Yes	0.5 or less
	Yes	No	0.4 or less
	No	Yes	0.3 or less
	No	No	0.2 or less
Horizontal	Yes	No	0.3 or less

Note: Operation using configurations other than shown above is not guaranteed.

• 543-705(B)/706(B)/707(B)

Spindle orientation	Spring	Weight (approximately 0.1 N)	Maximum measuring force (N)
Pointing vertically downward	Yes	Yes	0.7 or less
	Yes	No	0.6 or less
	No	Yes	0.4 or less
	No	No	Not guaranteed

Note: Operation using configurations other than shown above is not guaranteed.

SPECIFICATIONS

Metric				ISO/JIS type			ASME/ANSI/AGD type		
Order No.		Range (mm)	Resolution (mm)	Maximum permissible error MPE*1 (mm)			Measuring force MPL (N)	Net mass (g)	
w/lug	Flat back			MPE _E *3	Hysteresis MPE _H	Repeatability MPE _R		w/lug	Flat back
543-700	543-700B	12.7	0.0005/ 0.001/0.01 (selectable)	0.003	0.002	0.002	1.5 or less	175	165
543-705*2	543-705B*2						0.4 to 0.7	170	160
—	543-720B						1.8 or less	—	195
—	543-730B	50.8	—	—	—	—	260	260	260
543-710	543-710B	12.7	0.01	0.02	0.02	0.01	0.9 or less	170	160
543-715*2	543-715B*2						0.2 to 0.5	165	155
—	543-725B						1.8 or less	—	190
—	543-735B	50.8	—	—	—	—	245	245	245

*1 These values apply at 20 °C.

*2 Low measuring force

*3 Error of indication for the total measuring range

Inch / Metric


Inch / Metric				ISO/JIS type			ASME/ANSI/AGD type		
Order No.		Range	Resolution	Maximum permissible error MPE*1			Measuring force MPL (N)	Net mass (g)	
w/lug	Flat back			MPE _E *3	Hysteresis MPE _H	Repeatability MPE _R		w/lug	Flat back
543-701	543-701B	0.5 in/ 12.7 mm	0.00002/ 0.00005/ 0.0001/ 0.0005 in /0.0005 in	±0.00012 in /0.003 mm	0.00008 in /0.002 mm	0.00008 in /0.002 mm	1.5 or less	175	165
543-702	543-702B						1.5 or less	195	165
543-706*2	543-706B*2						0.4 to 0.7	170	160
543-707*2	543-707B*2	1 in/ 25.4 mm	0.0005/ 0.001/ 0.01 mm (selectable)	±0.0002 in /0.005 mm	0.00008 in /0.002 mm	0.00008 in /0.002 mm	0.4 to 0.7	190	160
—	543-721B	2 in/ 50.8 mm	—	—	—	—	1.8 or less	—	195
—	543-722B	—	—	—	—	—	2.3 or less	—	260
—	543-731B	2 in/ 50.8 mm	—	—	—	—	2.3 or less	—	260
—	543-732B	—	—	—	—	—	2.3 or less	—	260
543-711	543-711B	0.5 in/ 12.7 mm	0.0005 in/ 0.01 mm	±0.001 in /0.02 mm	0.001 in /0.02 mm	0.0005 in /0.01 mm	0.9 or less	170	160
543-712	543-712B						0.9 or less	190	160
543-716*2	543-716B*2						0.2 to 0.5	165	155
543-717*2	543-717B*2	1 in/ 25.4 mm	—	—	—	—	0.2 to 0.5	185	155
—	543-726B	2 in/ 50.8 mm	—	—	—	—	1.8 or less	—	190
—	543-727B	—	—	—	—	—	1.8 or less	—	190
—	543-736B	2 in/ 50.8 mm	—	—	—	—	2.3 or less	—	245
—	543-737B	—	—	±0.0015 in /0.04 mm	—	—	2.3 or less	—	245

*1 These values apply at 20 °C.

*2 Low measuring force

*3 Error of indication for the total measuring range



DIMENSIONS

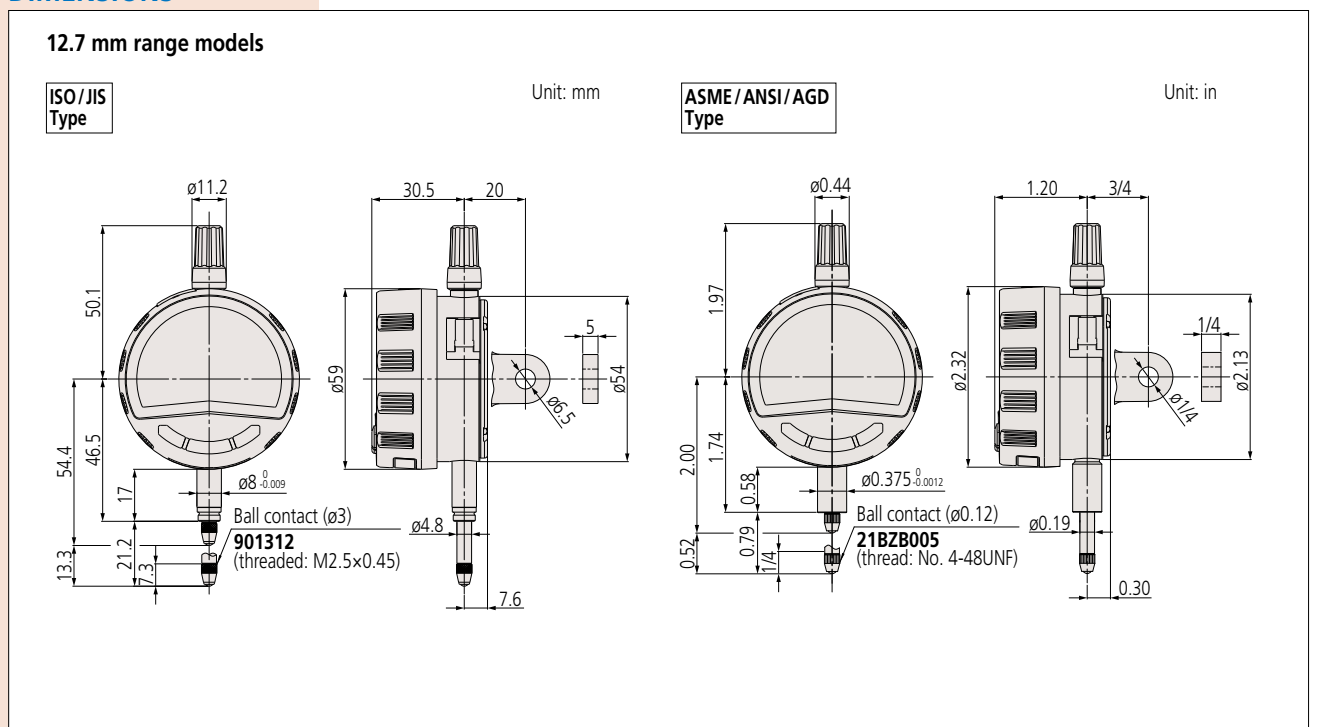

Note: Products with an Order No. suffixed "B" have a plain back, and other models have a center-lug back. Refer to page F-61 for details of the backs.

Digimatic Indicators

DIMENSIONS

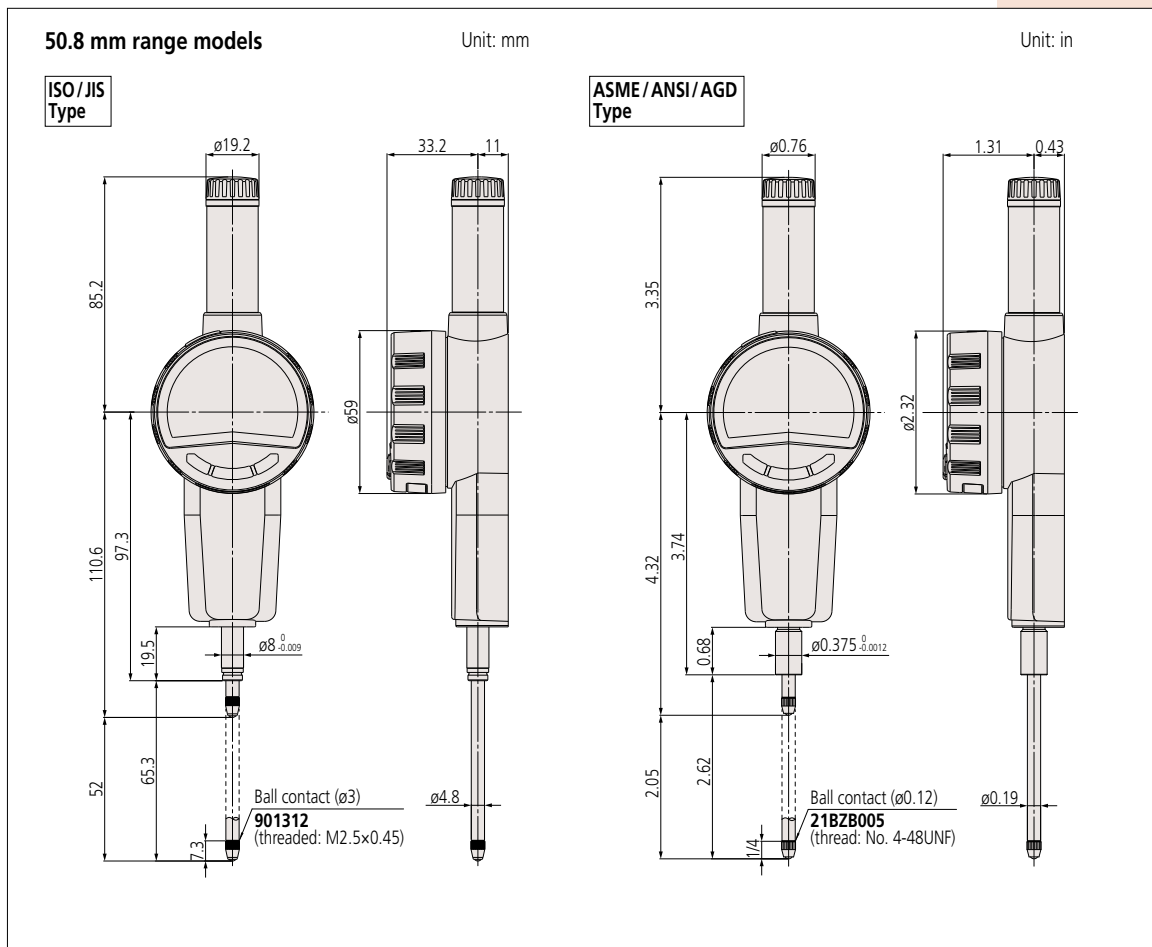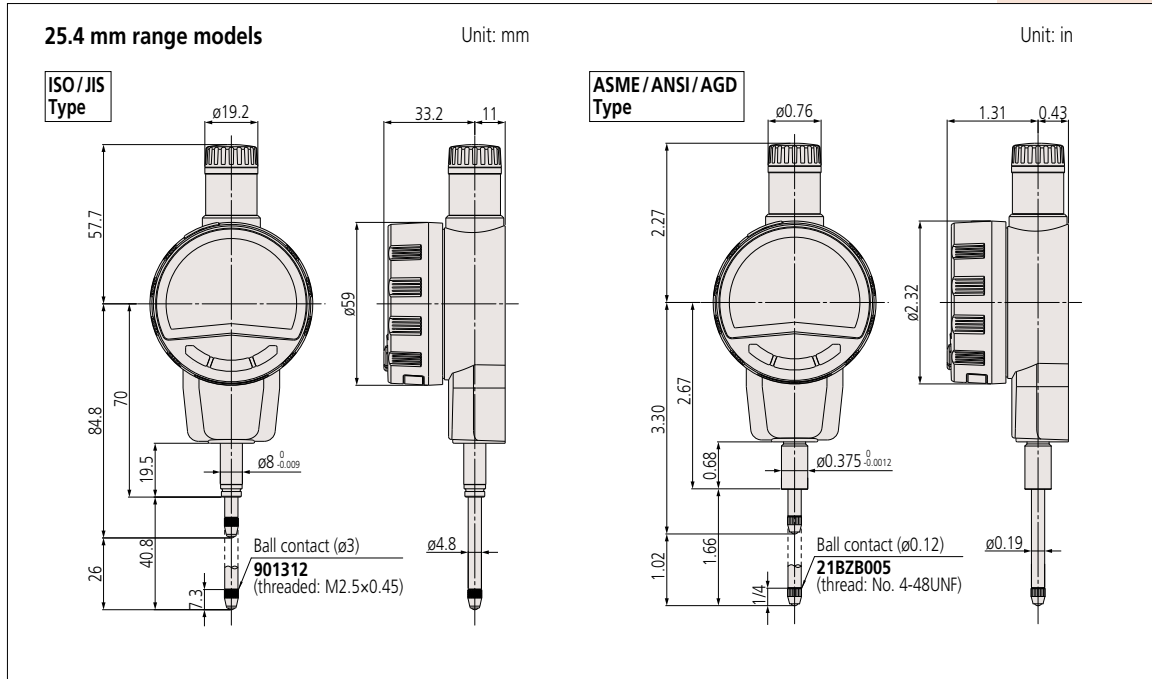

Note: Products with an Order No. suffixed "B" have a plain back, and other models have a center-lug back. Refer to page F-61 for details of the backs.



Dust- and Water- Protected
www.tuv.com ID: 000007181



Dust- and Water- Protected
www.tuv.com ID: 000007182

Applicable models:
543-57X

Applicable models:
543-58X

ABSOLUTE Digimatic Indicator ID-N/B SERIES 543 — with Dust/Water Protection Conforming to IP66

Functions

- Zero-setting (INC system)
- Presetting (ABS system)
- Measuring direction switching
- Tolerance judgment
- LCD readout reversal
- Resolution switching (For 0.001 mm or 0.00005 in resolution type)
- Data output
- Display value holding (when no external device is connected)
- Low battery voltage alarm display
- Error alarm display

- The ABS (absolute) scale restores the last origin position* automatically when the indicator is turned on, and realizes high reliability by eliminating over-speed errors.
- Rated to IP66: can be used satisfactorily even in adverse environments where the indicator is subject to splashing by cutting fluid or coolant.
- Slim body design (body width: only 35 mm) is advantageous in multipoint measurement situations where space is restricted. The LCD readout can also be rotated 180° to allow reading from the most convenient direction.

* Refer to "Origin Setting of Digimatic Indicators" on page F-25.

- Succeeded in digitalization of the Back Plunger type widely used for dial indicators for ID-B. A 5 mm-stroke plunger with a higher degree of accuracy has been implemented by adopting a direct reading scale for plunger displacement.
- Tolerance judgment can be performed by setting upper and lower tolerance limits. The judgment result (GO/NO-GO) can be displayed in full-size characters.
- Equipped with a data output port that enables incorporation into measurement networking and statistical process control systems. (Refer to page A-3)



Rated to IP66 water- and dust-proofing standard and oil resistance improved.



Body width 35 mm



LCD readout reversal function

SPECIFICATIONS

Metric

ISO/JIS type ASME/ANSI/AGD type

Order No.	Range (mm)	Resolution (mm)	Maximum permissible error (mm)			Measuring force MPL (N)	Remarks
			MPE _E *	Hysteresis MPE _H	Repeatability MPE _R		
543-570	12.7	0.01	0.02	0.02	0.01	2.5 or less	Slim type
543-580	5.0						Back Plunger type
543-575	12.7	0.01/0.001 (selectable)	0.01/0.003	0.002	0.002	2.5 or less	Slim type
543-585	5.0						Back Plunger type


Inch/Metric

Order No.	Range (in)	Resolution	Maximum permissible error			Measuring force MPL (N)	Remarks
			MPE _E *	Hysteresis MPE _H	Repeatability MPE _R		
543-571	0.5	0.0005 in/0.01 mm	±0.001 in/0.02 mm	0.001 in/0.02 mm	0.0005 in/0.01 mm	2.5 or less	Slim type
543-581	0.2						Back Plunger type
543-576	0.5	0.00005/0.0005 in/0.001/0.01 mm (selectable)	±0.0001 in/0.003 mm	0.0001 in/0.002 mm	0.0001 in/0.002 mm	2.5 or less	Slim type
543-586	0.2						Back Plunger type


* Error of indication for the total measuring range
Note: One silver oxide button cell (SR44) for monitor included

Digimatic Indicators

Typical applications

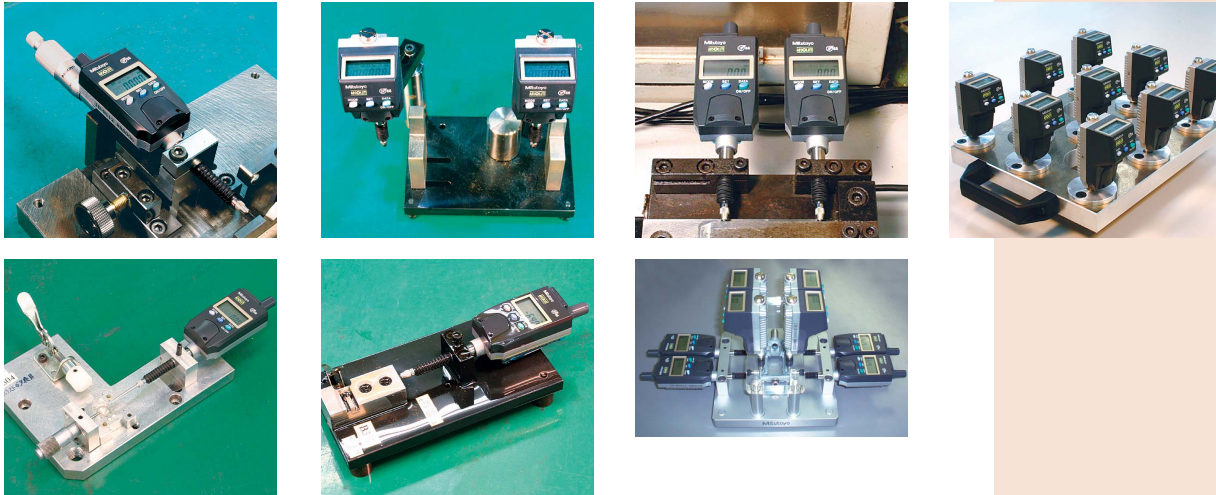

DIMENSIONS

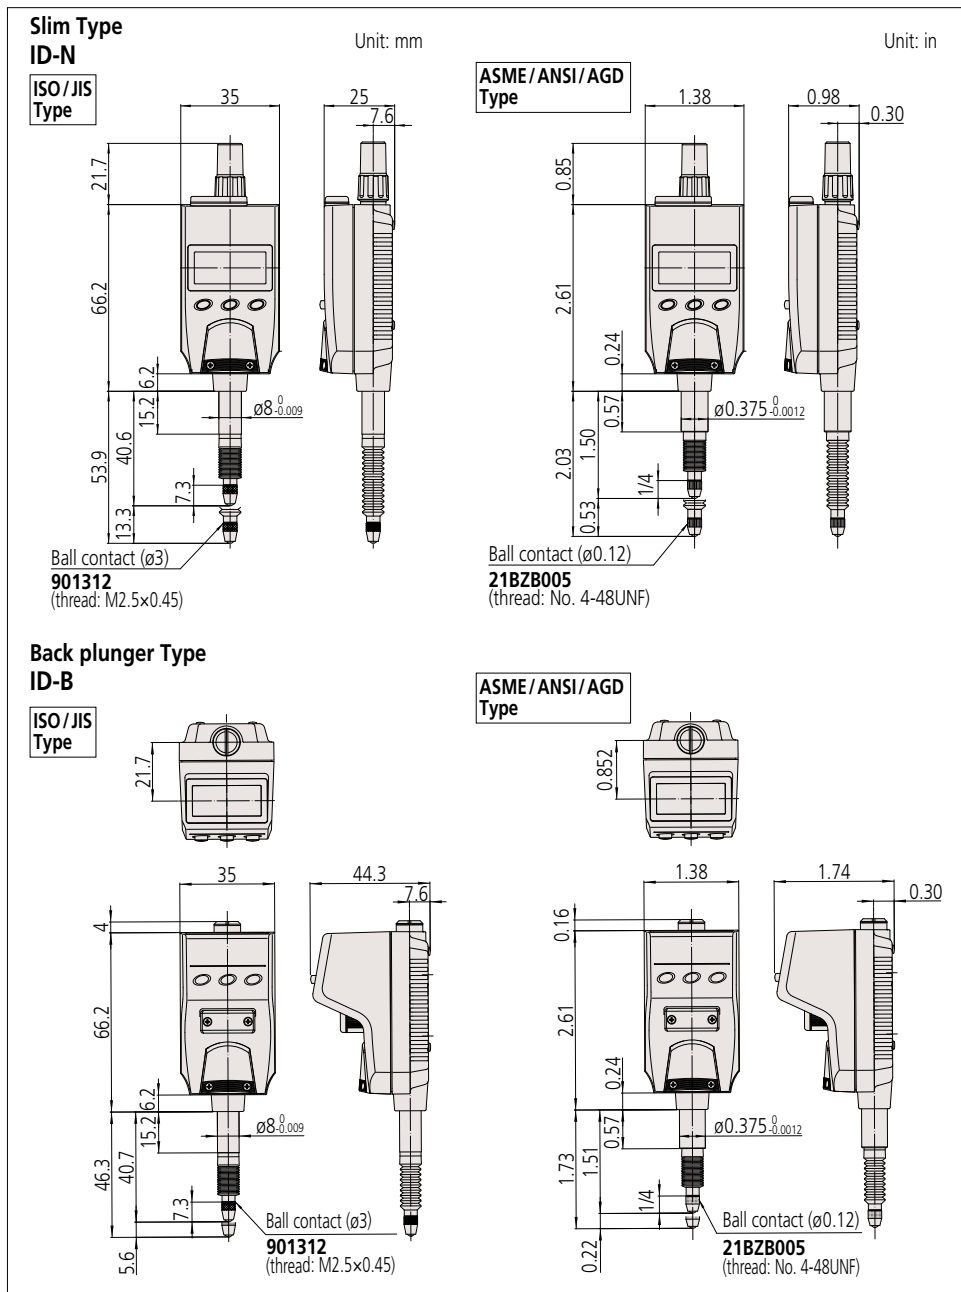

Optional Accessories


- Lug
21EZA145 (ISO/JIS type)
21EZA146 (ASME/ANSI/AGD type)
- Contact points for Mitutoyo's digimatic indicators. (Refer to pages F-57 to F-60 for details.)
- Lifting knob (only for ID-N)
21EZA105 (ISO/JIS type)
21EZA150 (ASME/ANSI/AGD type)
 Spindle can be manually lifted. Remove the spindle cap for ID-N and attach the lifting knob to the spindle. Note that water resistance is not maintained in this configuration.

Typical application using the lifting knob



- Arm for ID-B (made-to-order)
- Rubber boot
 For oil resistance (NBR) **21EAA423** (for ID-N)
21AAB562 (for ID-B)
 For durability (silicone) **238774** (for ID-N)
21EAA212 (for ID-B)

- SPC cable:
21EAA194 (1 m)
21EAA190 (2 m)

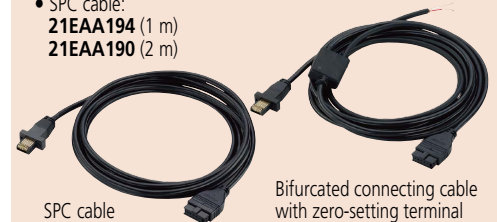

- USB Input Tool Direct (2 m): **06AFM380G**
- Input Tool Series
IT-020U (USB Keyboard Signal Conversion Type): **264-020**
IT-007R (RS-232C Communication Conversion Type): **264-007**
- Connecting Cables for U-WAVE-T (160 mm): **02AZD790G**
 For foot switch: **02AZE140G**
- Digimatic Mini-Processor **DP-1VA LOGGER**: **264-505**
- Bifurcated connecting cable with zero-setting terminal:
21EAA210 (1 m)
21EAA211 (2 m)
 Two of the wires inside the cable are separated for zero setting without touching the SET switch on the main body. Use these wires in combination with commercially available switches. Zero setting is performed by briefly connecting these two wires together (less than a second), and ABS preset & recall by connecting for a second or more.



Functions

- Peak detection (MAX/MIN)
- Runout (MAX - MIN) Hold
- Note: Peak detection
 - 1) Sampling rate: 50 readings/s
 - 2) Capturing speed: 50 μm/s (max.)
- Zeroret (INC system)
- Preset function (ABS system)
- Measuring direction switching
- Tolerance judgment (3 pairs of ABS, INC memory function)
- Resolution selection
- Simple calculation $f(x) = Ax$
- Analog bar resolution selection
- Key lock
- in/mm conversion (inch/mm type)
- Display hold (when no external device is connected)
- Data output
- External PC setting input
- Display rotation (330°)
- Low battery voltage alarm display
- Error alarm display


Optional Accessories

- Lifting
 - Lifting lever **21EZA198**
 - Lifting knob **21EZA105**
 - SPC Cable:
 - 905338** (1 m)
 - 905409** (2 m)
 - USB Input Tool Direct (2 m) : **06AFM380F**
 - Input Tool Series
 - IT-020U** (USB Keyboard Signal Conversion Type): **264-020**
 - IT-007R** (RS-232C Communication Conversion Type): **264-007**
 - Connecting Cables for **U-WAVE-T** (160 mm):
 - 02AZD790F**
 - For foot switch: **02AZE140F**
 - Digimatic Mini-Processor **DP-1VA LOGGER**: **264-505**
 - Parameter setup kit: **21EZA313**
- Note: Parameter setting software (can be downloaded for free from the Mitutoyo website) is also required.



Parameter setup kit

Parameter setting software

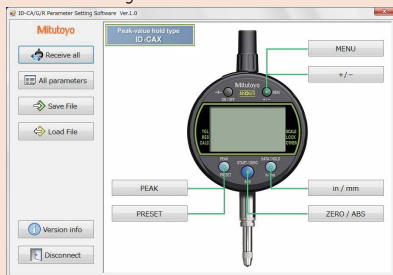

ABSOLUTE Digimatic Indicator ID-C SERIES 543 — Peak-Value Hold Type

- Run-out/MAX-MIN Hold function enables GO/NG judgment*1 for peak or difference values.
 - Five buttons, status icons, and clear button indications allow for easy operation of a wide variety of functions.
 - Wide LCD and new analog bar graph are now standard on all models.
 - The ABS (absolute) scale restores the last origin position*2 automatically when the indicator is turned on, and realizes high reliability by eliminating over-speed errors.
 - By using the parameter setup kit (optional) and the dedicated software, the functions and the parameters can be configured using a computer.
 - Equipped with a data output port that enables incorporation into measurement networking and statistical process control systems. (Refer to page A-3)
- *1 Tolerance judgment results cannot be output.
*2 Refer to "Origin Setting of Digimatic Indicators" on page F-25.



543-300-10 / 543-300B-10

SPECIFICATIONS

Metric		ISO/JIS type		ASME/ANSI/AGD type					
Order No. (w/lug, flat back)	Range (mm)	Resolution (mm)	Maximum permissible error (mm)	Measuring force MPL (N)	Power supply	Battery life (normal use)*2	Net mass (g)		
			MPE _E *1	Hysteresis MPE _H	Repeatability MPE _R				
543-300-10	12.7	0.001 / 0.01 (selectable)	0.003	0.002	0.002	1.5 or less	CR2032x1 pc.	Approx. 1 year	180
543-300B-10 *3									170

Inch / Metric		ISO/JIS type		ASME/ANSI/AGD type					
Order No. (w/lug, flat back)	Range	Resolution	Maximum permissible error	Measuring force MPL (N)	Power supply	Battery life (normal use)*2	Net mass (g)		
			MPE _E *1	Hysteresis MPE _H	Repeatability MPE _R				
543-301-10	0.5 in / 12.7 mm	0.00005 / 0.0001 / 0.0005 in, 0.001 / 0.01 mm (selectable)	±0.00010 in / 0.003 mm	0.00010 in / 0.002 mm	0.00010 in / 0.002 mm	1.5 or less	CR2032x1 pc.	Approx. 1 year	180
543-301B-10 *3									170
543-302-10									195
543-302B-10 *3									170

*1 Error of indication for the total measuring range
*2 Applies only if not connected to a data processor. Battery life depends on use of the indicator. Use the above value as a guide only.
*3 Flat back



ABSOLUTE Digimatic Indicator ID-C SERIES 543 — Bore Gage Type

Functions

- Minimum value detection
Note: Peak detection
 - 1) Sampling rate: 50 readings/s
 - 2) Capturing speed: 50 μm/s (max.)
- Preset (3 Preset values can be stored)
- Tolerance judgment (3 sets of upper and lower limits can be stored)
- Resolution selection
- Analog bar resolution selection
- Key lock
- Display hold (when no external device is connected)
- Data saving/calling (when no external device is connected)
- Data output
- External PC setting input
- Display rotation (330°)
- Low battery voltage alarm display
- Error alarm display

Optional Accessories

- SPC Cable:
 - 905338 (1 m)
 - 905409 (2 m)
 - USB Input Tool Direct (2 m): 06AFM380F
 - Input Tool Series
 - IT-020U (USB Keyboard Signal Conversion Type): 264-020
 - IT-007R (RS-232C Communication Conversion Type): 264-007
 - Connecting Cables for U-WAVE-T (160 mm): 02AZD790F
For foot switch: 02AZE140F
 - Digimatic Mini-Processor DP-1VA LOGGER: 264-505
 - Parameter setup kit: 21EZA313
- Note: Parameter setting software (can be downloaded for free from the Mitutoyo website) is also required.

The ABSOLUTE Digimatic Bore Gage



ABSOLUTE Digimatic Bore Gages, which integrate the display with a bore gage measuring unit, are also available. Refer to pages C-47 and C-48 for details.



- Dedicated to inside measurement with minimum-value Hold and tolerance judgment functions*1. Use together with a Mitutoyo bore gage (refer to pages C-29 to C-46 for details).
 - Five buttons, status icons, and clear button indications allow for easy operation of a wide variety of functions.
 - Wide LCD and new analog bar graph are now standard on all models.
 - Can store up to three sets of master reference values and tolerances, alleviating the need for multiple settings to master gages.
 - The ABS (absolute) scale restores the last origin position*2 automatically when the indicator is turned on, and realizes high reliability by eliminating over-speed errors.
 - By using the parameter setup kit (optional) and the dedicated software, the functions and the parameters can be configured using a computer.
 - Equipped with a data output port that enables incorporation into measurement networking and statistical process control systems. (Refer to page A-3)
- *1 Tolerance judgment results cannot be output.
*2 Refer to "Origin Setting of Digimatic Indicators" on page F-25.



543-310B-10

Typical application
The Bore Gage
is optional.

SPECIFICATIONS

		Metric		Maximum permissible error (mm)			Measuring force MPL (N)	Power supply	Battery life (normal use)*2	Net mass (g)
Order No.	Range (mm)	Resolution (mm)	MPE _E *1	Hysteresis MPE _H	Repeatability MPE _R					
543-310B-10	12.7	0.001/0.01 (selectable)	0.003	0.002	0.002	1.5 or less	CR2032 x1 pc.	Approx. 1 year	170	



		Inch / Metric		Maximum permissible error			Measuring force MPL (N)	Power supply	Battery life (normal use)*2	Net mass (g)
Order No.	Range	Resolution	MPE _E *1	Hysteresis MPE _H	Repeatability MPE _R					
543-311B-10	0.5 in/ 12.7 mm	0.00005/0.0001/ 0.0005 in, 0.001/0.01 mm (selectable)	±0.00010 in /0.003 mm	0.00010 in /0.002 mm	0.00010 in /0.002 mm	1.5 or less	CR2032 x1 pc.	Approx. 1 year	170	
543-312B-10										

*1 Error of indication for the total measuring range

*2 Applies only if not connected to a data processor. Battery life depends on use of the indicator. Use the above value as a guide only.
Note: Flat-back type only.

Digimatic Indicators

DIMENSIONS

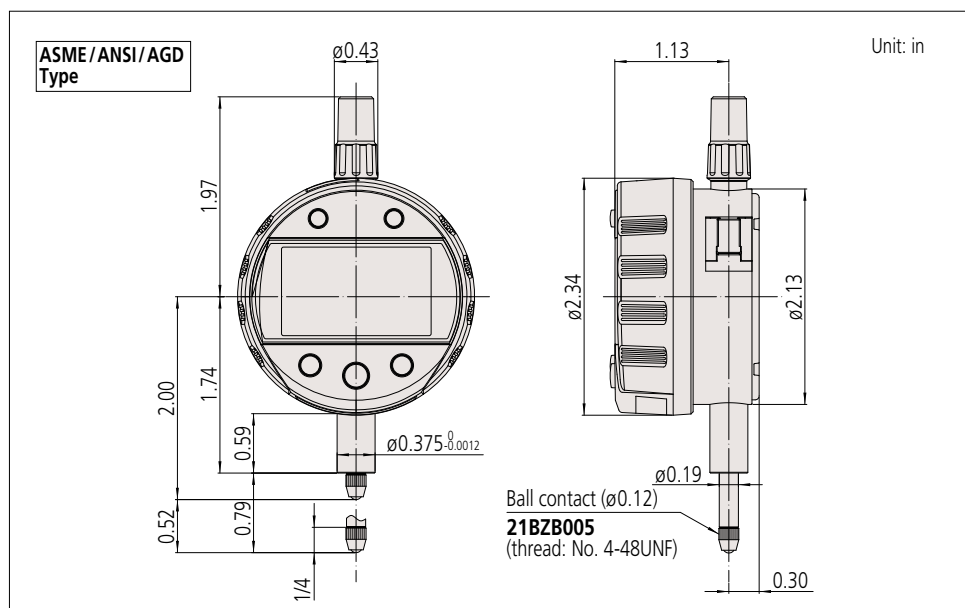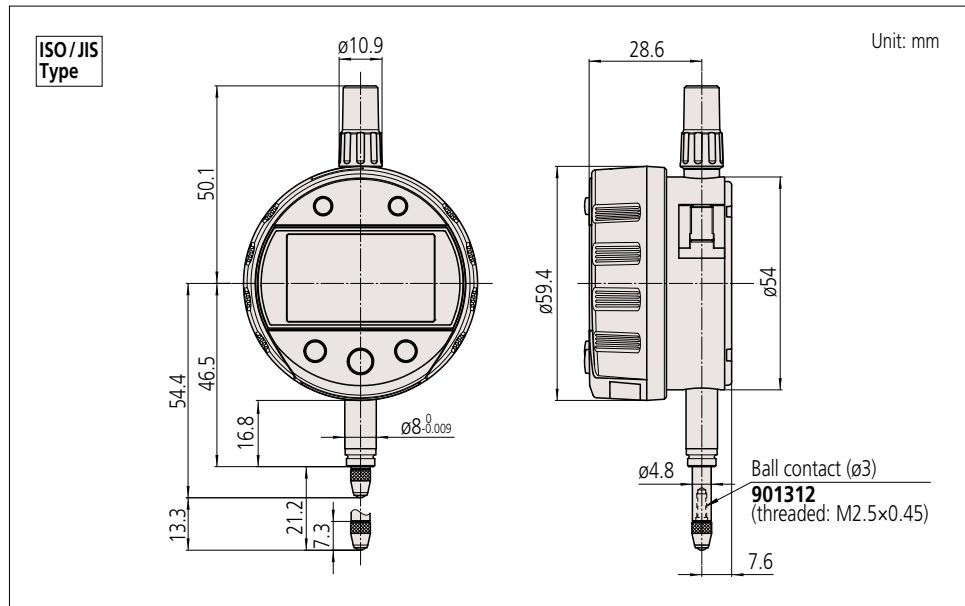



ABSOLUTE Digimatic Indicator ID-C SERIES 543 — Calculation Type

Functions

• Calculation f (x') =Ax'+B+Cx⁻¹
(x'=x+offset)

• Peak detection (MAX/MIN)

• Runout (MAX - MIN) Hold

Note: Peak detection

1) Sampling rate: 10 readings/s

2) Capturing speed: 10 μm/s (max.)

Settings can be changed to:

1) Sampling rate: 50 readings/s

2) Capturing speed: 50 μm/s (max.)

• Zero-setting (INC system)

• Preset (ABS system)

• Tolerance judgment

(3 pairs of ABS, INC memory function)

• Analog bar resolution selectable

• Key lock

• Display hold (when no external device is connected)

• Data output

• External PC setting input

• Display rotation (330°)

• Low battery voltage alarm display

• Error alarm display

• Resolution switching*

Resolution (mm)			Resolution (in)		
0.0002	0.005	0.1	0.00001	0.0002	0.005
0.0005	0.01	0.2	0.00002	0.0005	0.01
0.001	0.02	0.5	0.00005	0.001	0.02
0.002	0.05	1	0.0001	0.002	0.05

* Since the calculation resolution is one micrometer (0.001 mm), using sub-micrometer resolution settings may result in the 4th-place digit being unreliable, particularly when B is set to a very low value and C=0. It does not change at all with certain combinations of calculation coefficient (for example, A=1, B=C=0). The 3rd-place digit representing micrometers (if displayed) is always reliable.

Optional Accessories

• Lifting

Lifting lever **21EZA198**

Lifting knob **21EZA105**

• SPC Cable:

905338 (1 m)

905409 (2 m)

• USB Input Tool Direct (2 m): **06AFM380F**

• Input Tool Series

IT-020U (USB Keyboard Signal Conversion Type):

264-020

IT-007R (RS-232C Communication Conversion Type):

264-007

• Connecting Cables for **U-WAVE-T** (160 mm):

02AZD790F

For foot switch: **02AZE140F**

• Digimatic Mini-Processor **DP-1VA LOGGER: 264-505**

• Parameter setup kit: **21EZA313**

Note: Parameter setting software (can be downloaded for free from the Mitutoyo website) is also required.

- Calculation function operates on spindle displacement. Entering the appropriate formula factors for a fixture dedicated to the application enables direct measurement readout, thereby eliminating any need for the conversion tables previously needed for those applications where fixtures are typically used.
- Five buttons, status icons, and clear button indications allow for easy operation of a wide variety of functions.
- Wide LCD and new analog bar graph are now standard on all models.

- The ABS (absolute) scale restores the last origin position* automatically when the indicator is turned on, and realizes high reliability by eliminating over-speed errors.
- By using the parameter setup kit (optional) and the dedicated software, the functions and the parameters can be configured using a computer.
- Equipped with a data output port that enables incorporation into measurement networking and statistical process control systems. (Refer to page A-3)

* Refer to "Origin Setting of Digimatic Indicators" on page F-25.



543-342B-10

SPECIFICATIONS

□ Metric □ ISO/JIS type □ ASME/ANSI/AGD type

Order No.	Range (mm)	Resolution (selectable)	Maximum permissible error*1 (mm)			Measuring force MPL (N)	Power supply	Battery life (normal use)*4	Net mass (g)
			MPE _E *2	Hysteresis MPE _H	Repeatability MPE _R				
543-340B-10	12.7	12 steps*4	0.003	0.002	0.002	CR2032x1 pc.	Approx. 1 year	170	
543-590B-10	25.4								
543-595B-10	50.8		2.3 or less*3	260					

Order No.	Range	Resolution (selectable)	Maximum permissible error*1			Measuring force MPL (N)	Power supply	Battery life (normal use)*4	Net mass (g)
			MPE _E *2	Hysteresis MPE _H	Repeatability MPE _R				
543-341B-10	0.5 in	12 steps*4	±0.0001 in /0.003 mm	0.0001 in /0.002 mm	0.0001 in /0.002 mm	CR2032x1 pc.	Approx. 1 year	170	
543-342B-10	/12.7 mm								
543-591B-10	1 in		±0.00025 in /0.006 mm	2.3 or less*3	260				
543-592B-10	/25.4 mm								
543-596B-10	2 in								
543-597B-10	/50.8 mm								

*1 Valid for resolution set to 0.001 mm/0.00005 in and coefficients A=1, B=0 and C=0.

*2 Error of indication for the total measuring range



*3 Applies for a spindle orientation between the spindle pointing vertically downward to the spindle horizontal.

*4 Applies only if not connected to a data processor. Battery life depends on use of the indicator. Use the above value as a guide only.

Note: Flat-back type only.

Digimatic Indicators

DIMENSIONS

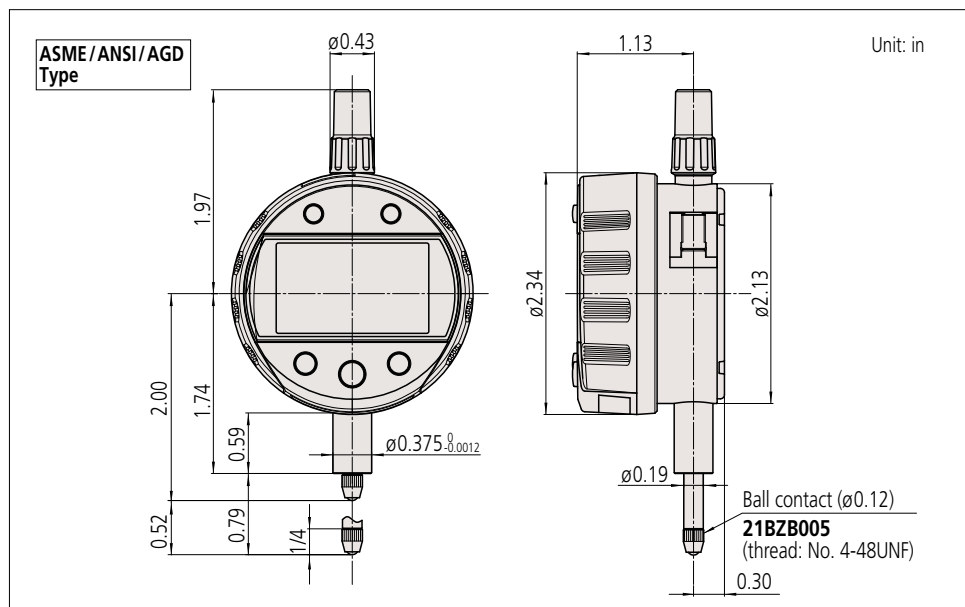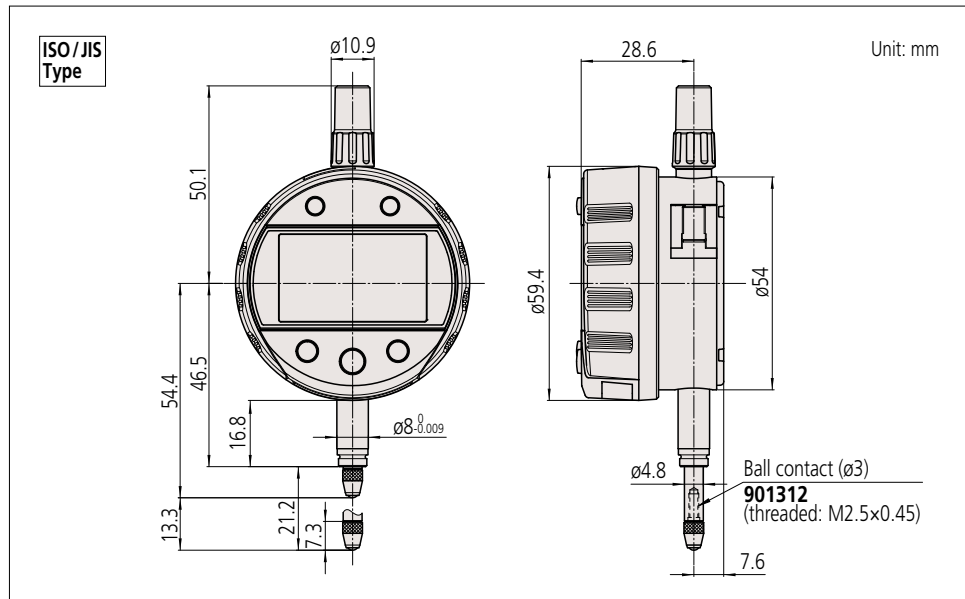

Typical applications



Examples of measuring various features

Item	D=Countersink diameter/Groove width; H=Countersink depth/Groove depth			R=Outside radius of round object		R=Inside radius of round object	R=Outside radius of round object		
Fixture type*1									
Contact point	Cone	Ball	Cone	—					
Measuring method x: Spindle displacement									
Calculation	D=Ax	D=Ax+B	H=Ax+B	D=Ax	R=Ax	R=Ax+B+Cx ⁻¹			
Coefficient values	A	$-2 \tan \frac{\theta}{2}$	$-2 \tan \frac{\theta}{2}$	-1	$-2 \tan \frac{\theta}{2}$	$-\frac{\sin \frac{\theta}{2}}{1 - \sin \frac{\theta}{2}}$	$\frac{1}{2}$	$-\frac{1}{2}$	$\frac{1}{2}$
	B	0	$2r \left(\frac{1}{\cos \frac{\theta}{2}} - \tan \frac{\theta}{2} \right)$	$r \left(\frac{1}{\sin \frac{\theta}{2}} - 1 \right) - \frac{d}{2 \tan \frac{\theta}{2}}$	0	0	-r	r	-r
	C	0	0	0	0	0	$\frac{L^2}{2}$	$-\frac{L^2}{2}$	$\frac{L^2}{2}$
Origin offset value (function ON/OFF)	d (OFF)	0 (OFF)	0 (OFF)	0 (OFF)	0 (OFF)	0 (OFF)	0 (OFF)	0 (OFF)	d (ON)
ORIGIN-set position (x=0 position)									
Displayed measurement value at ORIGIN-set position (Value displayed when x=0)	0	Value of coefficient B	0	0	0	Err 30*2 (Overflow error of Display value)		Depends on value of d	

*1 A dedicated fixture for a workpiece can be made to order.

*2 The error is cleared when the measured value returns to the displayable range as a result of moving the spindle.

Digimatic Indicators

ABSOLUTE Digimatic Indicator ID-C SERIES 543 — Signal Output Function Type

- Enables GO/NG judgment to be output to external equipment for a measurement result against the peak values set. Solid-state switching provides high reliability by avoiding metallic switch contacts.
- The signal can be output to an external device such as a sequencer. The GO/NG judgment result is also indicated by the green/red LED and the signs on LCD.
- A peak-detection function makes runout measurements easy.
- The ABS (absolute) scale restores the last origin position* automatically when the indicator is turned on, and realizes high reliability by eliminating over-speed errors.
- Provided with a 4 m cable.
- External power supply required is 5-24 VDC / 100 mA (max.).
- Dust-water protection level: IP54.

* Refer to "Origin Setting of Digimatic Indicators" on page F-25.



543-350-10

SPECIFICATIONS

Metric							
Order No.	Range (mm)	Resolution (mm)	Maximum permissible error (mm)			Measuring force MPL (N)	Net mass (g)
			MPE _E *1	Hysteresis MPE _H	Repeatability MPE _R		
543-350-10	12.7	0.001/0.01 (selectable)	0.003	0.002	0.002	2.5 or less	295
543-350B-10*2							285

□ ISO/JIS type □ ASME/ANSI/AGD type

Inch/Metric								
Order No.	Range	Resolution	Maximum permissible error			Measuring force MPL (N)	Net mass (g)	
			MPE _E *1	Hysteresis MPE _H	Repeatability MPE _R			
543-351-10	0.5 in / 12.7 mm	0.00005/0.0001 / 0.0005 in, 0.001/0.01 mm (selectable)	±0.00010 in / 0.003 mm	0.0001 in / 0.002 mm	0.0001 in / 0.002 mm	2.5 or less	295	
543-351B-10*2							285	
543-352-10								295
543-352B-10*2								285

*1 Error of indication for the total measuring range

*2 Flat back

Note 1: LCD readout does not rotate.

Note 2: MAX/MIN holding: sample rate is 100 readings/s; max. rate of change of reading is 100 μm/s or less.

Note 3: Standard contact point: **901312** (ISO/JIS type), **21BZB005** (ANSI/AGD type)

ABSOLUTE™



IP54

Functions

- Signal output (-NG/OK/+NG, N-ch open drain, logical invert is available)
- Remote control (peak start preset/zero-set)
- Peak detection (MAX/MIN)
- Runout range measurement (MAX - MIN)
- Zero-setting (INC system)
- Presetting (ABS system)
- Measuring direction switching
- Tolerance judgment (3 pairs of ABS, INC memory function)
- Resolution switching
- Simple calculation: f(x) = Ax
- Key lock
- Calibration mode (Signal output in Digimatic code format)
- Error alarm display

Optional Accessories

- Lifting*1
 - Lifting lever **21EZA198**
 - Lifting knob **21EZA105**
 - Digimatic power supply unit: **21EZA345**
To denote your AC power cable add the following suffixes to the order No.: **A** for UL/CSA, **D** for CEE, **DC** for CCC, **E** for KC. **No suffix** is required for JIS/100VAC.
Used in the calibration mode when executing automatic inspection using i-Checker **IC2000**. In such a case, purchase connecting cable **21EAA194** (1 m), or **21EAA190** (2 m).
Note: It can't be used as a power supply when using in the normal mode.
 - Contact points for Mitutoyo's digimatic indicators.*2
 - Interchangeable backs for SERIES 2 models (Refer to page F-61 for details.)
- *1 Dust-water protection is not guaranteed.
*2 Refer to pages F-57 to F-60 for details.

Output signals and LCD display



Wire	- NG	OK	+ NG	ABS data composition error
Orange (- NG)	Low	High	High	High
Green (OK)	High	Low	High	High
Brown (+ NG)	High	High	Low	High
LED	Red	Green	Red	Red flashing
LCD	◀	○	▶	"x.xxE" indication

Note: Logical invert is available.



I/O Specifications

Wire	Signal	I/O	Description
Black	- V (GND)	—	Connected to minus (-) terminal
Red	+ V	—	Power supply (5 to 24 VDC)
Orange	- NG	O	Tolerance judgment result output: Only the terminal corresponding to a judgment result is set to the low level.
Green	OK	O	
Brown	+ NG	O	
Yellow	PRESET_RECALL ZERO	I	External input terminal: If the relevant terminal is set to the low level, its signal becomes true.
Blue	PEAK_START	I	
Shield	FG	—	Connected to GND (Earth)

Note: Measurement data cannot be output.

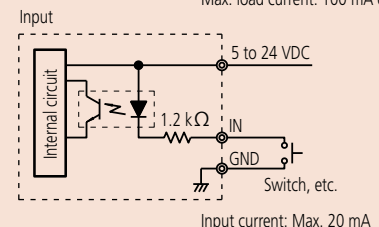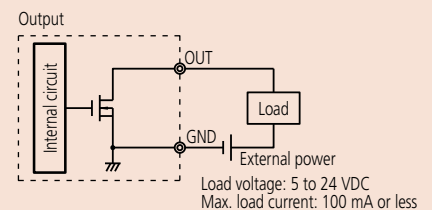

DIMENSIONS

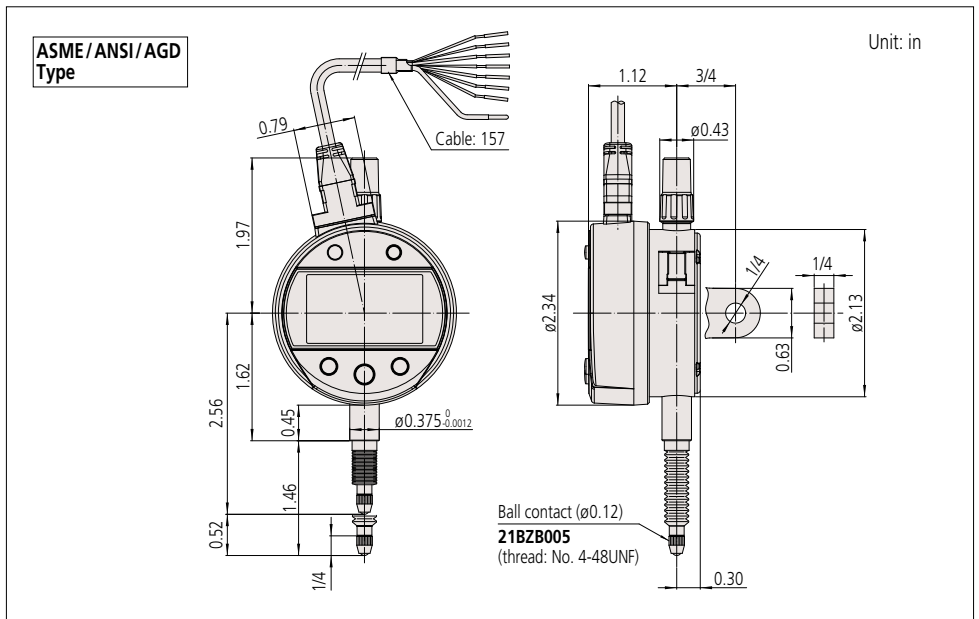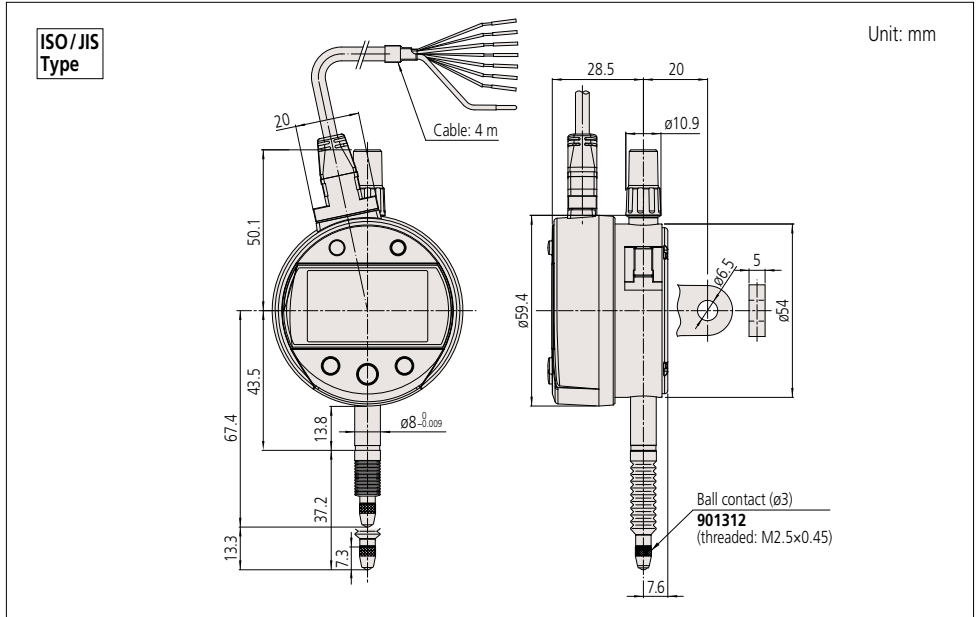



ABSOLUTE Digimatic Indicator ID-U SERIES 575 — Slim and Economical Design

- General-purpose slim indicator with a measuring range of 25.4 mm and a resolution of 0.01 mm.
- Cost-effective and user-friendly type with basic functions.
- The ABS (absolute) scale restores the last origin position* automatically when the indicator is turned on, and realizes high reliability by eliminating over-speed errors.
- Battery life: approx. 20,000 hours in continuous use.
- Easy-to-read large LCD readout with a character height of 8 mm.
- Equipped with a data output port that enables incorporation into measurement networking and statistical process control systems. (Refer to page A-3)

* Refer to "Origin Setting of Digimatic Indicators" on page F-25.



575-121

SPECIFICATIONS

ISO/JIS type ASME/ANSI/AGD type

Order No.	Range (mm)	Resolution (mm)	Maximum permissible error (mm)			Measuring force MPL (N)
			MPE _E * [†]	Hysteresis MPE _H	Repeatability MPE _R	
575-121	25.4	0.01	0.02	0.02	0.01	1.8 or less

Order No.	Range	Resolution	Maximum permissible error			Measuring force MPL (N)
			MPE _E * [†]	Hysteresis MPE _H	Repeatability MPE _R	
575-122	1 in/	0.0005 in/	±0.001 in/0.02 mm	0.001 in/ 0.02 mm	0.0005 in/ 0.01 mm	1.8 or less
575-123	25.4 mm	0.01 mm				

* Error of indication for the total measuring range

Technical Data

- Display: 5-digit LCD, sign
 - Battery: SR44 (1 pc.), **938882** for initial operational checks (standard accessory)
 - Battery life: Approx. 20,000 hours of continuous use. Approx. 5 years under normal use.
- Note: It varies depending on use frequency and method. Please take the values as rough indications.
- Lifting lever: **21EAA426** (standard accessory)



Function

- Origin set (Zero-setting)
- Measuring direction switching
- Data output
- Low battery voltage alarm display
- Error alarm display

Optional Accessories

- Spindle lifting cable (stroke: 10 mm): **21JZA295**
 - Contact points for Mitutoyo's digimatic indicators (Refer to pages F-57 to F-60 for details.)
 - SPC Cable:
 - 905338** (1 m)
 - 905409** (2 m)
 - USB Input Tool Direct (2 m): **06AFM380F**
- Note: Please separately purchase **USB-ITPAK** since there is no data output switch on the measurement instrument.
- Input Tool Series
 - IT-020U** (USB Keyboard Signal Conversion Type): **264-020**
 - IT-007R** (RS-232C Communication Conversion Type): **264-007**
 - Connecting Cables for **U-WAVE-T** (160 mm): **02AZD790F**
 - For foot switch: **02AZE140F**
 - Digimatic Mini-Processor **DP-1VA LOGGER**: **264-505**
 - Measuring stands (Refer to pages F-84 to F-91 for details.)

DIMENSIONS

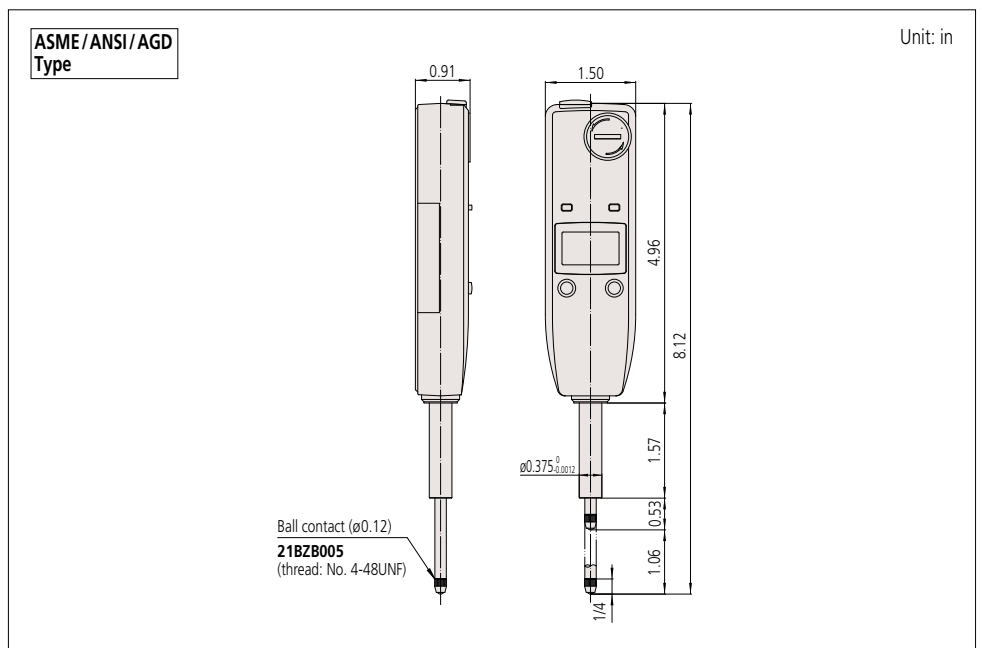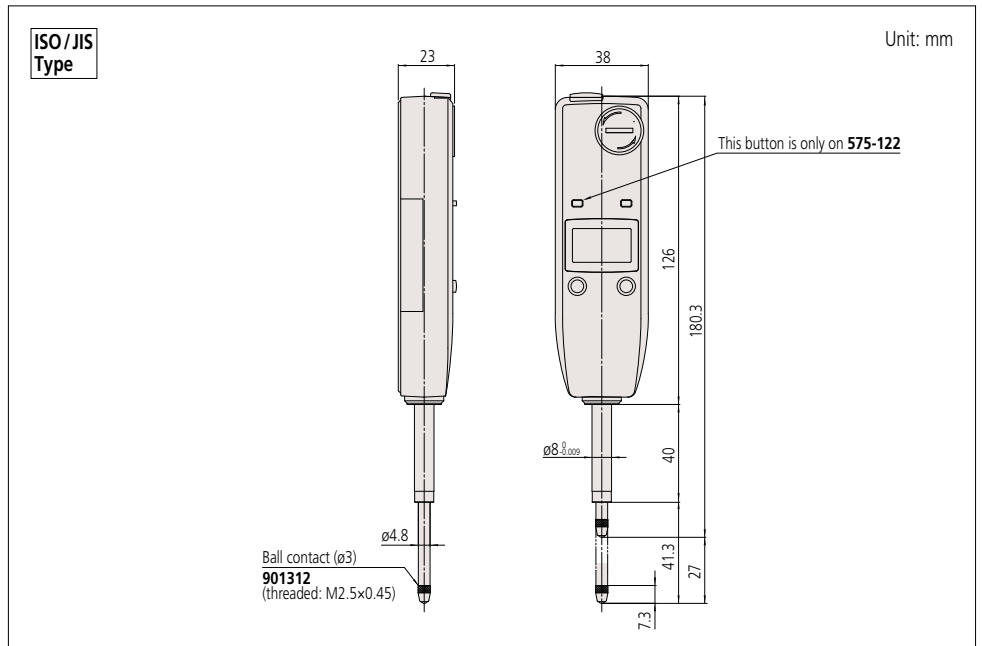

Digimatic Indicators

Digimatic Indicator ID-H SERIES 543 — High Accuracy and High Functionality Type

- A top-level digital indicator that supports high accuracy and multi-functional measurement.
- Take advantage of its high accuracy backed up by 0.0005 mm/0.00002 inch resolution, remote control functionality via a handheld controller (or an RS-232C interface) and easy runout measurements with the well-established analog bar display.
- Functionality meets the needs of diverse measurement applications.

Tolerance judgment



- Measuring maximum value, minimum value and runout (MAX - MIN)

Maximum value/minimum value measurement




Difference/runout measurement



Example: Indicator traces between points <A> to <D>

Difference (or Total Runout) is displayed as <A>. Dimensions (maximum value) and <C> (minimum value) can be retrieved from memory with a simple key sequence or using the remote control (optional).

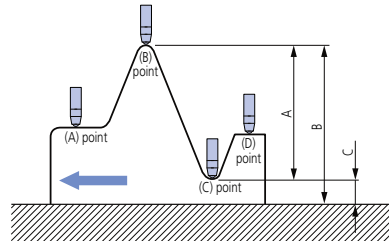

- With the optional remote controller, operations such as zero-setting and presetting can be made without touching the indicator body, thereby avoiding disturbance to the set-up.
- An advanced, remote control system can be implemented with the built-in RS-232C interface and a PC.
- Equipped with a data output port that enables incorporation into measurement networking and statistical process control systems. (Refer to page A-3)



Remote controller (optional)

Comparator stand
215-505-10



Remote controller

Lifting cable



Lifting knob

Technical Data

- Display: 7-digit LCD, sign, and analog bar with 2-color backlight
- Power supply: 5.9 V DC (via AC adapter) **06AGZ369***
- * To denote your AC power cable add the following suffixes to the order No.: **JA** for UL/CSA and PSE, **D** for CEE, **DC** for CCC, **E** for BS, **K** for KC, **No suffix** is required for JIS/100 V
- Positional detection method: Photoelectric-type reflection linear encoder
- Maximum response speed: 1000 mm/s
- Lifting lever: **21EAA426** (standard accessory)

Optional Accessories

- Remote controller: **21EZA099**
- Lifting
 - Lifting cable: **21JZA295** (stroke 30 mm)
 - Lifting knob: **21EZA101**
- SPC Cable:
 - 936937** (1 m)
 - 965014** (2 m)
- USB Input Tool Direct (2 m): **06AFM380D**
- Input Tool Series
 - IT-020U** (USB Keyboard Signal Conversion Type): **264-020**
 - IT-007R** (RS-232C Communication Conversion Type): **264-007**
- Connecting Cables for **U-WAVE-T** (160 mm): **02AZD790D**
- For foot switch: **02AZE140D**
- RS-232C Connecting cable (2 m): **21EAA131**
- Lug-on-center back:
 - 101040** (ISO/JIS type)
 - 101306** (ASME/ANSI/AGD type)
- Contact points for Mitutoyo's digimatic indicators (Refer to pages F-57 to F-60 for details.)
- Digimatic Mini-Processor **DP-1VA LOGGER**: **264-505**
- Granite comparator stands (Refer to page F-88 for details.)
- Comparator stands (Refer to page F-90 for details.)

MeasurLink ENABLED
Data Management Software by Mitutoyo



SPECIFICATIONS

Metric							
Order No.*1	Range (mm)	Resolution (mm)	Maximum permissible error (mm)			Measuring force MPL (N)	Net mass (g)
			MPE _E *2	Hysteresis MPE _H	Repeatability MPE _R		
543-561	30.4	0.0005/ 0.001 (selectable)	0.0015	0.0015	0.001	2.0 or less	290
543-563	60.9		0.0025	0.0025		2.5 or less	305

Inch / Metric							
Order No.*1	Range	Resolution	Maximum permissible error			Measuring force MPL (N)	Net mass (g)
			MPE _E *2	Hysteresis MPE _H	Repeatability MPE _R		
543-562	1.2 in /30.4 mm	0.00002/ 0.00005/ 0.0001 in, 0.0005/ 0.001 mm (selectable)	±0.00006 in/ 0.0015 mm	0.00006 in/ 0.0015 mm	0.00004 in/ 0.001 mm	2.0 or less	300
543-564	2.4 in /60.9 mm		±0.0001 in/ 0.0025 mm	0.0001 in/ 0.0025 mm		2.5 or less	

*1 To denote your AC power cable add the following suffixes to the order No.: **A** for UL/CSA, **D** for CEE, **DC** for CCC, **E** for BS, **K** for KC, **No suffix** is required for JIS/100 V



*2 Error of indication for the total measuring range

Note 1: The indicator can output SPC (Digimatic) data consisting of up to 6 digits in full. If the data consists of 7 digits the first digit is not output (example: 123.4565 mm is output as 23.4565 mm).

Note 2: Regarding origin setting, refer to "Origin Setting of Digimatic Indicators" on page F-25.

Note 3: The orientation for use can be from vertical (contact point pointing downward) to horizontal (spindle in horizontal orientation).

DIMENSIONS

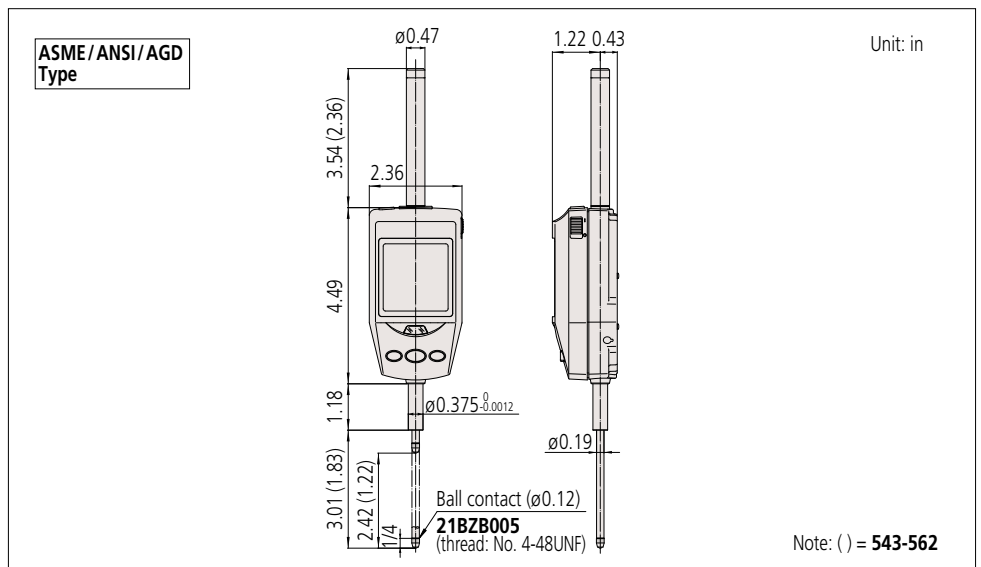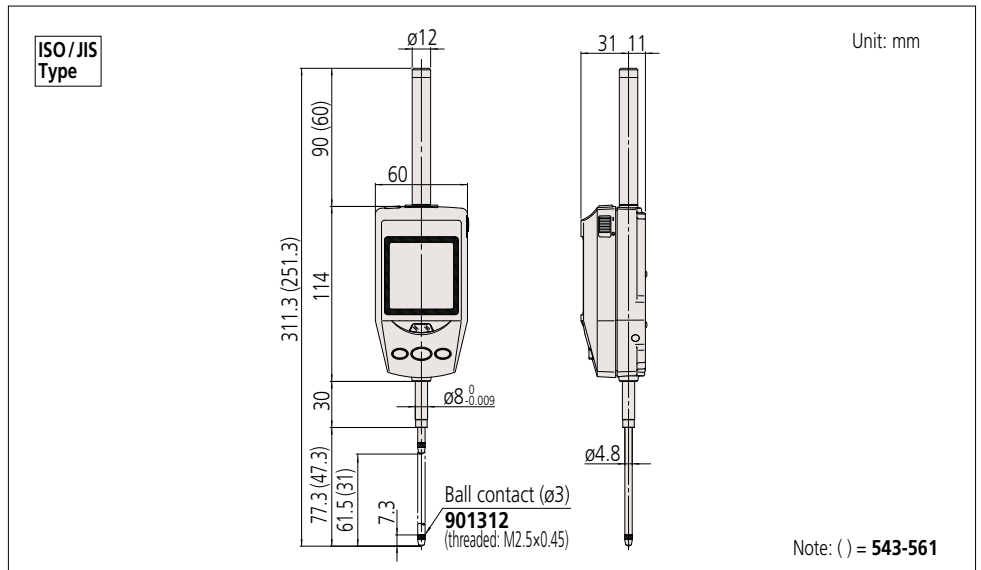



High-performance ABS Digimatic Indicator ID-F SERIES 543 — with Back-lit LCD Screen

- Supports bidirectional communication between the ID-F and the computer, enabling data output to a computer and setting of various functions of ID-F from a computer.
- The face can be rotated 330° to maintain the ease of use and readability of the characters and the bar even when the ID-F is used horizontally or at an angle.

- GO/±NG judgment function: If a judgment result shows an out of tolerance condition, the display backlighting changes from green to red.
- Green indication for GO judgment Red indication for ±NG judgment



- An analog bar indicator has been integrated to make upper/lower limit and turnover point reading more comfortable.
- The ABS (absolute) scale restores the last origin position* automatically when the indicator is turned on, and realizes high reliability by eliminating over-speed errors.
- Easy-to-read large LCD readout with the height of the characters has been increased from 8.5 mm with the previous model to 11 mm (about 1.5 times as much).
- External power supply type: an AC adapter is a standard accessory. Does not require battery replacement.
- The maximum resolution is 0.5 μm (0.0005 mm). With a indication error corresponding to 0.0025 mm, this indicator can be used in high-precision applications.
- Equipped with a data output port that enables incorporation into measurement networking and statistical process control systems. (Refer to page A-3)

* Refer to "Origin Setting of Digimatic Indicators" on page F-25.

Technical Data

- Display: 7-digit LCD, sign, and analog bar with 2-color backlight
- Power supply: 5.9 V (via AC adapter) **06AGZ369***
- * To denote your AC power cable add the following suffixes to the order No.: **JA** for UL/CSA and PSE, **D** for CEE, **DC** for CCC, **E** for BS, **K** for KC
- Lifting lever: **21EAA426** (standard accessory)

Functions

- Peak detection (MAX/MIN)
- Runout range measurement (MAX - MIN)
- Zero-setting (INC system)
- Presetting (ABS system)
- Measuring direction switching
- Tolerance judgment
- Resolution switching
- Simple calculation f(x) = Ax
- Analog resolution selection
- Data hold (when not connected to an external device)
- Function Lock
- Calibration schedule warning
- Data output
- Display rotation (330°)
- Error alarm display

Optional Accessories

- Lifting knob:
 - 21EZA197** (25.4 mm/1 inch type)
 - 21EZA200** (50.8 mm/2 inch type)
 - Auxiliary spindle spring:
 - 02ACA571** (25.4 mm/1 inch type)
 - 02ACA773** (50.8 mm/2 inch type)
 - SPC cable:
 - 06AGL011** (1 m)
 - 06AGL021** (2 m)
 - USB Input Tool Direct (2 m): **06AGQ001F**
 - Measurement data collection software **USB-ITPAK V3.0: 06AGR543**
 - Input Tool Series
 - IT-020U** (USB Keyboard Signal Conversion Type): **264-020**
 - IT-007R** (RS-232C Communication Conversion Type): **264-007**
 - Connecting Cables for **U-WAVE-T** (160 mm): **02AZG011**
 - For foot switch: **02AZG021**
 - Contact points for Mitutoyo's digimatic indicators*1
 - Interchangeable backs for SERIES 2 models*2
 - Digimatic Mini-Processor **DP-1VA LOGGER: 264-505**
 - Measuring stands*3
- *1 Refer to pages F-57 to F-60 for details.
*2 Refer to page F-61 for details.
*3 Refer to pages F-84 to F-91 for details.

SPECIFICATIONS



Order No.	Range (mm)	Resolution (mm)	Resolution switching (mm)	Maximum permissible error MPE (mm)			Response speed	Measuring force MPL (N)	Power supply	Net mass (g)
				MPE _E *	Hysteresis MPE _H	Repeatability MPE _R				
543-851	25.4	0.0005	0.0005/ 0.001/ 0.01	0.0025	0.002	0.002	Unlimited	1.8 or less 2.3 or less	AC adapter (5.9 V)	240
543-853	50.8			0.004						330
543-857	50.8			0.003						

ISO/JIS type ASME/ANSI/AGD type

Order No.	Range	Resolution	Resolution switching	Maximum permissible error MPE			Response speed	Measuring force MPL (N)	Power supply	Net mass (g)
				MPE _E *	Hysteresis MPE _H	Repeatability MPE _R				
543-852	1 in/ 25.4 mm	0.00002 in/ 0.00005 mm	0.00002/ 0.00005/ 0.0001/ 0.0005/ 0.001 in/ 0.005/ 0.01 mm	±0.0001 in/ 0.0025 mm	0.00008 in/ 0.002 mm	0.00008 in/ 0.002 mm	Unlimited	1.8 or less 2.3 or less	AC adapter (5.9 V)	240
543-854	2 in/ 50.8 mm			±0.00016 in/ 0.004 mm						330
543-858	2 in/ 50.8 mm			±0.00012 in/ 0.003 mm						

* Error of indication for the total measuring range (MPE_E)
Note: Measures precisely Max., Min., and TIR (amplitude (Max - Min) values. (Peak detection speed: 500 times/s)


DIMENSIONS

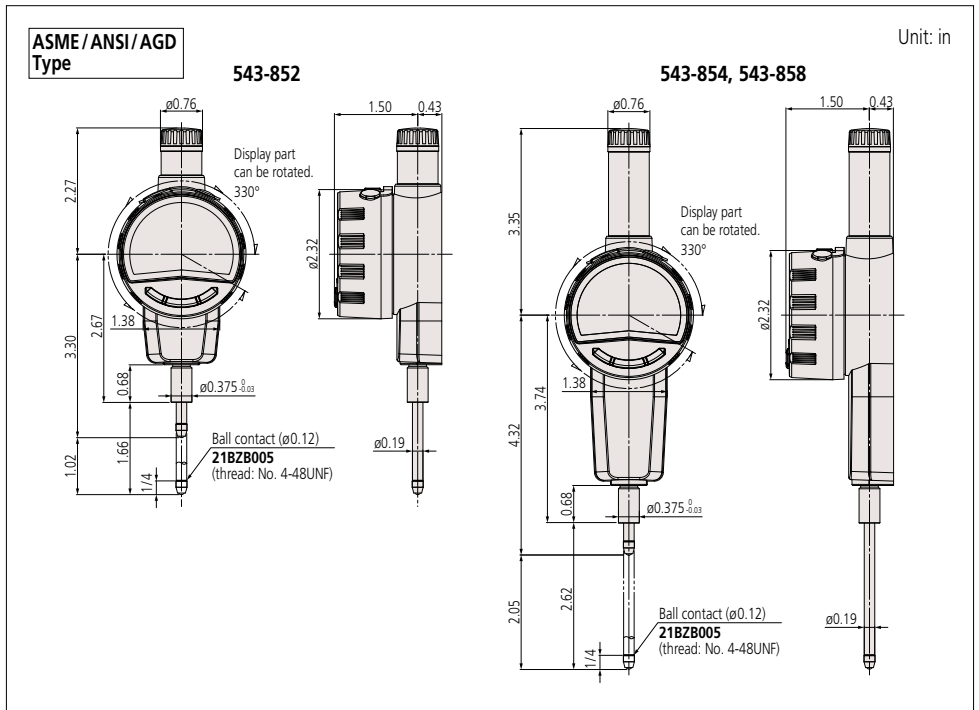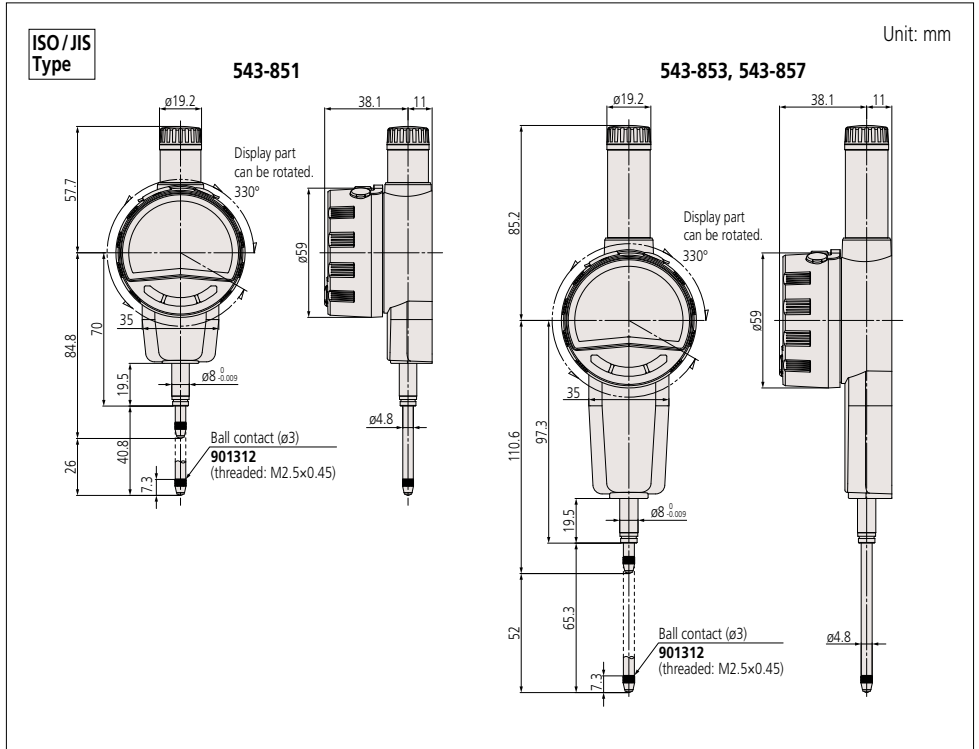

Digimatic Indicators

Supplemental information on Digimatic Indicators

Origin setting of Digimatic Indicators

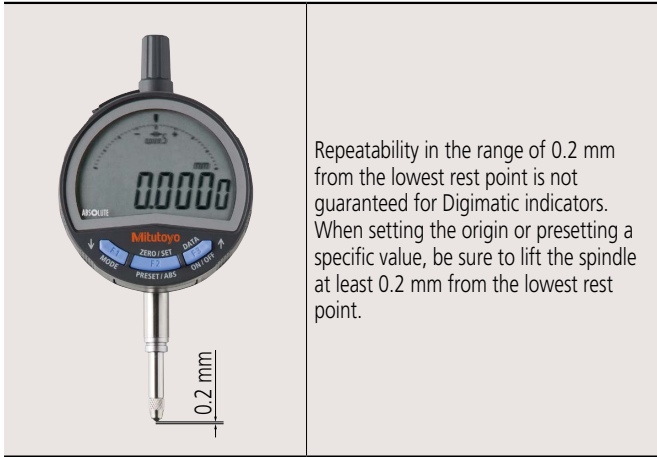

Repeatability in the range of 0.2 mm from the lowest rest point is not guaranteed for Digimatic indicators. When setting the origin or presetting a specific value, be sure to lift the spindle at least 0.2 mm from the lowest rest point.

EC Counter SERIES 542 — Low-cost, Modular Type Display Unit

- -NG, OK and +NG tolerance judgment results can be displayed.
- Can be set to produce either tolerance judgment output or Digimatic output.
- Small size (96×48 mm) which conforms to DIN standards.



542-007

SPECIFICATIONS

Order No.	542-007*
Resolution () indicates maximum display range	0.01 mm (±9999.99)/0.0005 in (±99.9995 in)/0.001 in (±99.999 in) 0.001 mm (±9999.999)/0.00005 in (±9.99995 in)/0.0001 in (±99.999 in) [automatic setting by gage]
Tolerance judgment display	LED display (3 steps: Amber, Green, Red)
External output (switching type)	Tolerance judgment output: -NG, OK, +NG (open-collector) Data output: Digimatic output
Control input	External PRESET, external HOLD
Operation temperature range	0 to 40 °C (RH 20 to 80%, no condensation)
Storage temperature range	-10 to 50 °C (RH 20 to 80%, no condensation)
External dimensions	96 (W) × 48 (H) × 84.6 (D) mm
Power Supply	AC adapter: 12BAR954 AC cable: 12BAK729 (Japan), 12BAK730 (U.S.), 12BAK731 (EU), 12BAK734 (UK), 12BAK732 (China), 12BAK733 (Korea)
Standard Accessories	AC adapter, AC cable, rubber feet
Mass	220 g

* To denote your AC power cable add the following suffixes to the order No.: **A** for UL/CSA, **D** for CEE, **DC** for CCC, **E** for BS, **K** for KC, **C** and **No suffix** are required for PSE.

MeasurLink[®] ENABLED
Data Management Software by Mitutoyo

Functions

- Preset
- Tolerance judgment (3 steps)

DIMENSIONS

